



## • M7 STRETCHER

Howard Wright's purpose is making human care easier. In developing the M7 Stretcher our R&D Team worked with healthcare professionals to develop a lightweight, easy to clean and elegant design, ideal for the treatment, transport and recovery of patients.

The M7 Stretcher is straightforward and practical to use meaning minimal servicing and user training is required. It has full electric functionality to reduce patient handling. The stretcher deck has multiple sockets for a wide range of accessories including a permanently attached folding telescopic IV pole.





### FEATURES

- Fully electric functions with individual lock-out and battery backup
- 300kg Safe Working Load
- 400mm low height and 800mm high height
- High performance LINAK and TENTE components
- 5th wheel option
- Central locking braking with 2 brake pedals and 1 steer castor
- 16° Trendelenburg and reverse Trendelenburg
- CPR quick release backrest
- Fold down, ergonomic siderails
- Drainage bag rails
- Push handles

### ACCESSORIES

- Permanently attached IV pole
- Head and foot panels
- Monitor tray
- Storage basket
- Oxygen cylinder holder (2 sizes)
- Urine bottle holder
- Full range of accessories available



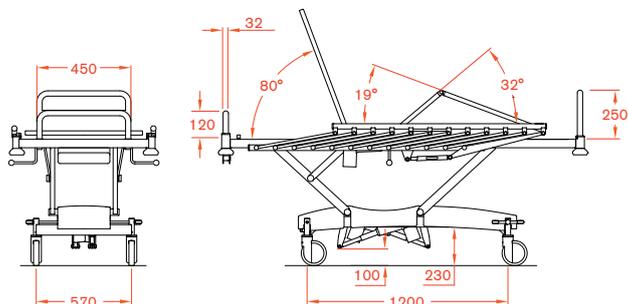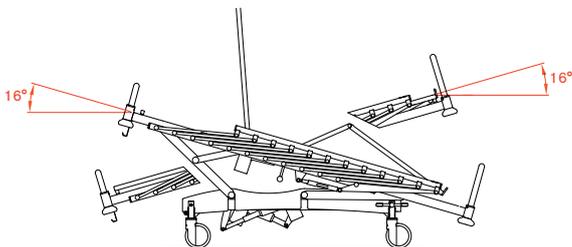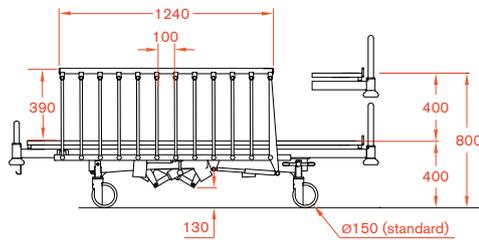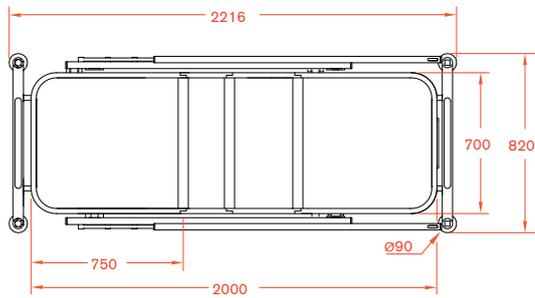

<b>MODEL:</b>	M7 Stretcher
<b>IP RATING:</b>	IPX4
<b>EEC CLASSIFICATION:</b>	Class 1, Non-invasive
<b>MAXIMUM SWL:</b>	300kg (incl. patient & accessories)
<b>BED MASS:</b>	120kg (incl. siderails & bed ends)

**EXTRA FEATURES:**

- Durable powdercoated steel structure
- 4 large soft corner buffers
- LINAK electric system with 3 or 4 actuators. Approved to EN 60601-1
- Power input: 220-240 VAC, 50-60 Hz, 3.0 A maximum
- Power output: 24 VDC
- Backrest, legraise and deck height have safety spline
- Potential equalisation terminal
- Central locking braking with 2 brake pedals (5th wheel steering optional)
- 4 accessory sockets
- CPR quick release backrest
- Power cord storage at head end of bed

**DIMENSIONS:**

- Overall (incl. corner buffers): L: 2216mm, W: 820mm
  - Mattress platform: L: 2000mm, W: 700mm
  - Backrest: L: 750mm
  - Push handles: W:450mm, D:32mm, H:120mm head end, 250mm foot end
  - Bed end option: W: 490mm, D: 40mm, H: 315mm (above mattress platform)
  - Siderail: L: 1240mm, H: 390mm (above mattress platform)
  - Space between bars: 100mm
  - Corner buffer diameter: 90mm
  - Wheel base: 1200mm, wheel track: 570mm
  - Castor diameter: 150mm single wheel
  - Maximum deck height: 800mm, minimum deck height: 400mm
  - Linear translation as bed raises and lowers: 0mm
  - Deck tilt angle (head up and head down): 16°
  - Maximum backrest angle: 80°
  - Maximum upper legrest angle: 32°
  - Maximum lower legrest angle: 19°
- (All angular dimensions are with reference to horizontal)

**UNDER BED CLEARANCES (FOR PATIENT LIFTERS)**

- Elevator to floor: Deck low: 130mm, deck high: 100mm
- Bogie to floor: 230mm

**TESTING:**

- Developed in accordance with the requirements of AS/NZS 3200.2:38:2007 & IEC 60601-2-38:1996-10

Paraite Road, Bell Block  
 PO Box 3003, Fitzroy  
 New Plymouth 4341  
 New Zealand  
 T. +64 (6) 755 0976  
 F. +64 (6) 755 0908

PO Box 2786  
 Taren Point  
 New South Wales 2229  
 Australia  
 T. 1800 120 727  
 F. 1800 120 717



Howard Wright Limited has a policy of continuous product improvement and reserves the right to change product specifications without notice. Howard Wright Limited is certified to ISO13485:2003.